



# SERIE E36 HM




## MINIATURE BLIND HOLLOW SHAFT ABSOLUTE MULTITURN ENCODER

- Singleturn resolution up to 13 bits
- Multiturn resolution up to 24 bits
- Magnetic technology
- External diameter 36,5 mm
- Blind hollow shaft  $\varnothing$  6 mm or 8 mm
- Protection class IP64 according to DIN EN 60529
- Connection by cable (other cable length available)




Magnetic Encoder   Absolute Encoder   Miniature Encoder   Vibration and shock resistant   IP64   Temperature range   Express Delivery

### Setscrew / Flexible flange (90.1037)

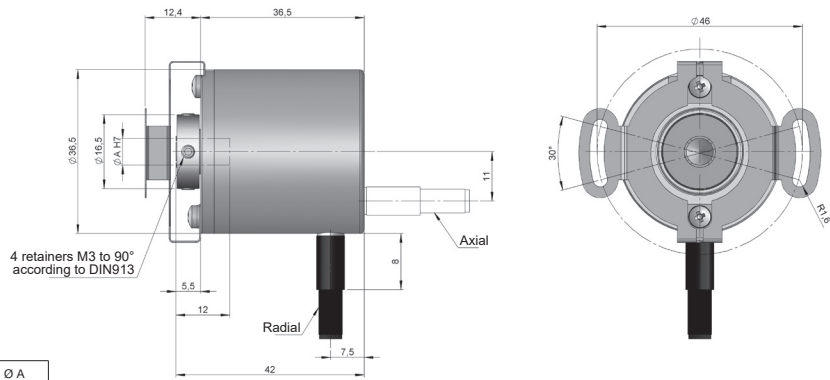

BLIND HOLLOW SHAFT	$\varnothing$ A
1	6 mm
2	8 mm

### Setscrew / Flexible flange (90.1111)

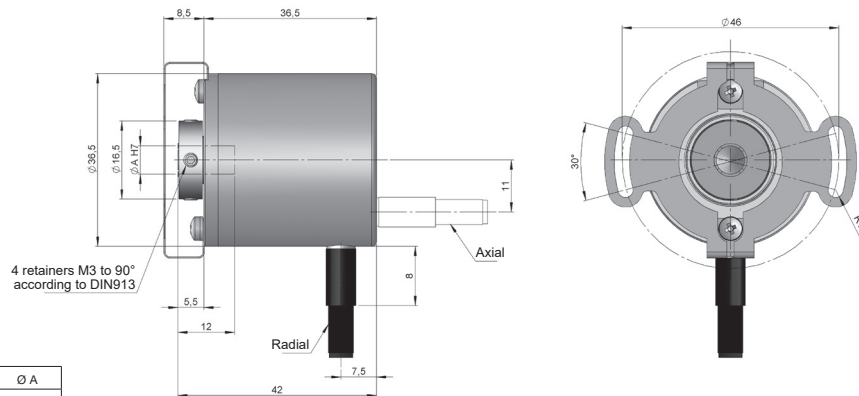

BLIND HOLLOW SHAFT	$\varnothing$ A
1	6 mm
2	8 mm



# SERIE E36 HM

## MINIATURE BLIND HOLLOW SHAFT ABSOLUTE MULTITURN ENCODER



REFERENCE										Reference example: E36HM-BIS-11211-1212
Serie	Interface	Anti-rotation system	Blind-Hollow shaft	Connection	Code	Power Supply / Electronic output	Singleturn resolution	Multiturn resolution	Special customer	
E36HM -	BIS -	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> -	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>
	BIS. BISS-C	1. Flexible flange (90.1037) 2. Flexible flange (90.1111) (*)	1. Ø 6 mm 2. Ø 8 mm	1. Axial cable 2. Radial cable	1. Binary CW 2. Binary CCW	1. 4,75...30 VDC / RS422	09. 9 bits 10. 10 bits 11. 11 bits 12. 12 bits 13. 13 bits	12. 12 bits 16. 16 bits 20. 20 bits 24. 24 bits	LN. +105°C	

Order your reference  
Step file 3D

[info@encoderhohner.com](mailto:info@encoderhohner.com)  
service available in 24 h

(\*) Anti-rotation system type 1 (Flexible flange 90.1037) and 2 (Flexible flange 90.1111) supplied assembled.

### MECHANICAL SPECIFICATIONS

Materials	Housing: Aluminium Flange: Aluminium Shaft: Stainless Steel
Bearings	Ballraces
Bearings lifetime	1x10 <sup>10</sup> rev.
Housing fixing	Flexible flange (included)
Permitted misalignment	±0.3 mm axial, ±0.2 mm radial (90.1037) ±0.2 mm axial, ±0.1 mm radial (90.1111)
Shaft fixing	Setscrew
Blind hollow shaft diameter	6 mm or 8 mm
Maximum number of revolutions permitted mechanically	6000 rpm - Standard 10000 rpm - Upon request 12000 rpm (≤ 12 bits) - Upon request
Protection against dust and splashes according to DIN EN 60529	IP64
Rotor inertia moment	10 gcm <sup>2</sup>
Starting torque at 20°C (68°F)	≤ 0,01 Nm
Maximum load permitted on axial shaft	20 N
Maximum load permitted on radial shaft	40 N
Weight aprox.	0,08 Kg
Operating temperature range	-40°C to +85°C - Standard -40°C to +105°C - Special Customer LN
Vibration according to DIN EN 60068-2-6	100 m/s <sup>2</sup> (10Hz...2000Hz)
Shock according to DIN EN 60068-2-27	1000 m/s <sup>2</sup> (6ms)
Axial or radial connection	2 meters cable (other cable lengths available on order)

# SERIE E36 HM

## MINIATURE BLIND HOLLOW SHAFT ABSOLUTE MULTITURN ENCODER



### ELECTRICAL SPECIFICATIONS

Interface



Electronic output	RS422
Power supply (VCC)	4,75...30 VDC
Consumption	≤ 100 mA
Code	Binary
Protocol	BISS-C
Singleturn resolution	up to 13 bits
Multiturn resolution	up to 24 bits
Absolute accuracy	±0,35°
Relative accuracy	±1,5 LSB
Max. load capability / channel	±20 mA
“Low” signal level	< 0,8 VDC
“High” signal level	2 ... 5,5 VDC
Frequency	50 kHz...2 MHz
Short circuit protection	Yes
Protection polarity inversion	Yes

### CONNECTION



	<b>Cable</b> 8x0,14 mm <sup>2</sup> 95.0008052
GND	White
VCC	Brown
DATA+	Yellow
DATA-	Pink
CLK+	Green
CLK-	Grey
PRESET*	Red
DIR**	Blue

(\* ) Apply a 4,75...30 VDC pulse (more than 1 ms) to set the encoder to Zero and reboot the encoder (turn off and then turn on the power supply).

(\*\* ) Connect to 4,75...30 VDC to change direction from default. If this input is not used, it should be connected to GND in order to avoid interferences. The encoder must be always rebooted (turn off and then turn on the power supply) after switching.