

### NF 80 battery connector

### Request an offer

Are you interested in this product? Do you need additional information or individual pricing?

Contact us

☎ **227035225**  
✉ **pzl\_i@dacpol.eu**

## Product information

### Battery connector NF 80

#### Characteristics:

- Voltage: 150V DC max
- Amperage: 80A
- Temperature range: -20°C / +90°C
- Housing: acidproof plastic
- Contacts: copper alloy, silver plated, (to crimp or to solder)
- Amperage of auxiliary contact: 20 A
- Section of auxiliary contact: 2,5 mm<sup>2</sup> i 4 mm<sup>2</sup>
- Watertightness: IP23
- Normes: NF EN 1175-1 and DIN VDE 0623-589

#### Complete connectors:

	Ref.	Description	Section	
			mm2	AWG
Connector	<b>169081</b>	Male	16	6
	<b>169082</b>	Male	25	4
Connector	<b>169083</b>	Female	16	6
	<b>169084</b>	Female	25	4
Auxiliary contacts	<b>169085</b>	Male - 20 A	2.5	14
	<b>169086</b>	Female - 20 A	2.5	14
Handle	<b>169087</b>	Red color	-	



#### Spare parts:

	Ref.	Description	Section	
			mm2	AWG
Connector	<b>169094</b>	Męski	16	6
	<b>169095</b>	Męski	25	4
Connector	<b>169096</b>	Żeński	16	6
	<b>169097</b>	Żeński	25	4





<b>Housing</b>	<b>169092</b>	Wtyk męski	-
	<b>169093</b>	Gniazdo żeńskie	-
<b>Voltage coding key</b>	<b>169088</b>	Kolor czarny tradycyjny akumulator	-
	<b>169089</b>	Kolor szary żelowy akumulator	-

## NF 80 Male

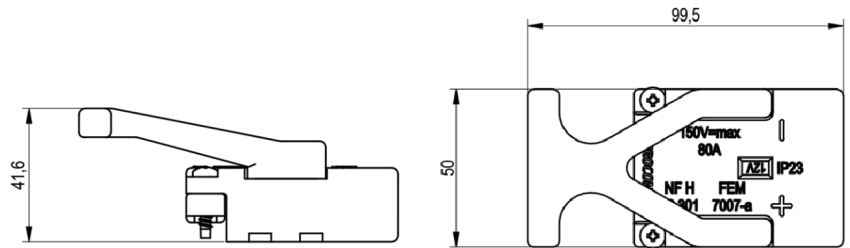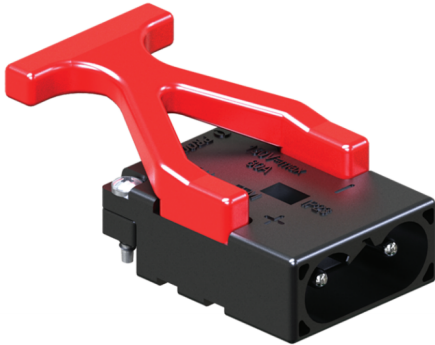

## NF 80 Female

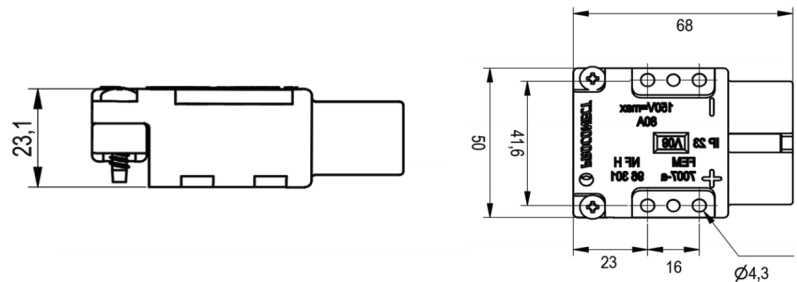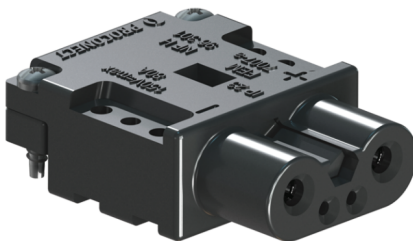

## NF 80 connector

