
Cordless NF 160 battery connector
Request an offer

Are you interested in this product? Do you need additional information or individual pricing?

Contact us

☎ **227035225**

✉ **pzl_i@dacpol.eu**

Product information
Battery connector NF 160
Characteristics:

- Voltage: 150V DC max
- Amperage: 160A
- Temperature range: -20°C / +90°C
- Housing: acidproof plastic
- Contacts: copper alloy, silver plated, (to crimp or to solder)
- Amperage of auxiliary contact: 20 A
- Section of auxiliary contact: 2,5 mm² i 4 mm²
- Watertightness: IP23
- Normes: NF EN 1175-1 and DIN VDE 0623-589

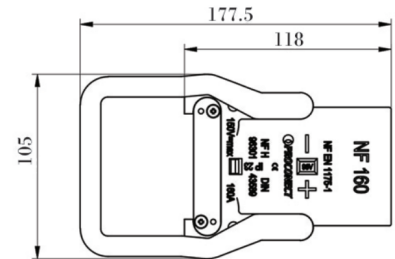
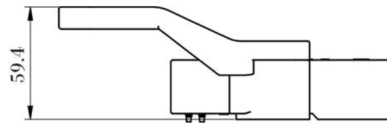
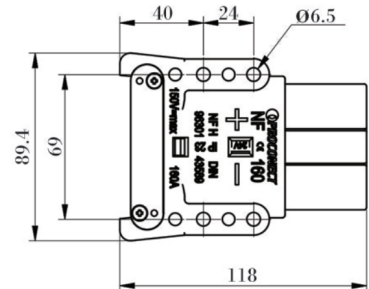

Complete connectors:

	Ref.	Description	Section	
			mm ²	AWG
Connector	169161-N	Male	50	1/0
	169162-N	Male	35	2
Connector	169165-N	Female with handle	50	1/0
	169166-N	Female with handle	35	2
	169175-N	Female	50	1/0
	169176-N	Female	35	2
	169361-N	Male - 20 A	2.5	14
Auxiliary contacts	169355-N	Male - 32 A	4	12
	169364-N	Male - 20 A	2.5	14
	169362-N	Female - 20 A	2.5	14
	169356-N	Female - 32 A	4	12
	169365-N	Female - 20 A	2.5	14
Handle	169339	Black color	-	
	169339-R	Red color		

	169339-RH	Red color - reinforced	
Air connector	169363-N	Air connector	-
Dust cap	169195	Male and Female	-

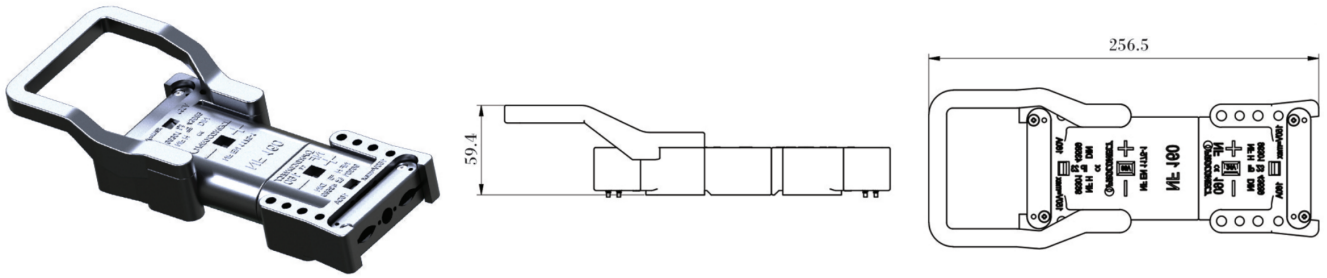
Spare parts:

	Ref.	Description	Section	
			mm2	AWG
Contact	169181-N	Male	16	6
	169182-N	Male	25	4
Contact	169185-N	Female	16	6
	169186-N	Female	25	4
Housing	169190-N	Male	-	
	169191-N	Female		
Reducers	169196	50 mm ² / 35 mm ²	-	
	169197	50 mm ² / 35 mm ²		
	169198	35 mm ² / 16 mm ²		
Voltage coding key	169199-N	Black color wet battery	-	
	169193-N	Grey color gel battery		

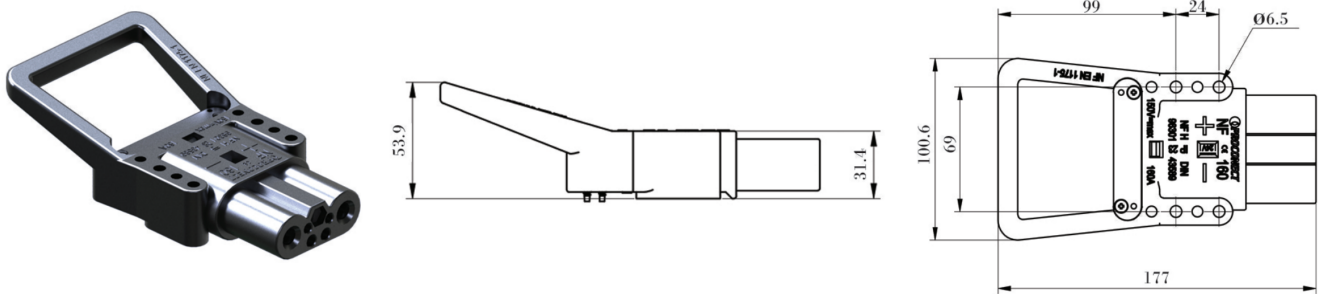
NF 160 Male

NF 160 Female




NF 160 Connector



NF 160 Female with handle



NF 160 Dust cap



169195